

3D-Ready AV Receiver featuring 1080p-compatible HDMI repeater (4 in/1 out), YPAO sound optimisation, SCENE functionality and Upgraded CINEMA DSP.



### High Sound Quality

- 5-channel powerful surround sound (600W=120W x 5 for Europe, 500W=100W x 5 RMS)
- 192 kHz/24-bit Burr Brown DACs for all channels
- High dynamic power, low-impedance drive capability

### High Picture Quality

- 1080p-compatible HDMI repeater (4 in/1 out)
- Supports Deep Colour (30/36 bit), x.v.Colour, 100Hz or 120Hz/24Hz Refresh Rates and Auto Lip-Sync compensation

### Advanced Features

- SCENE buttons with direct power on (BD/DVD, TV, CD and Radio) – quick and simple to use
- HDMI (V.1.4 with 3D\*)
- YPAO sound optimisation for automatic speaker setup
- Front panel mini jack input for connecting portable audio player

- Audio input assign capability for HDMI and component video input
- 9 selectable subwoofer crossover frequencies
- Subwoofer phase select / Subwoofer out
- Initial Volume Setting and Maximum Volume Setting
- Audio Delay for adjusting Lip-Sync (0-240ms)
- Versatile digital audio input terminals (2optical/2 coaxial)
- 40-station preset tuning and Radio Data System
- Auto power down function with variable time setting

### Surround Realism

- Upgraded CINEMA DSP with 17 DSP programmes
- Compressed Music Enhancer
- Adaptive DRC (Dynamic Range Control) and Adaptive DSP level
- SILENT CINEMA and Virtual CINEMA DSP



The RX-V367 offered with black, titanium and silver finish available in some areas.

\* HDMI 3D feature will be available via firmware update.

## Main Specifications

Audio Section	
Maximum Output Power per Channel (For Europe, 4 ohms, 1 kHz, 0.7% THD)	
Front L/R Channels	120 W/ch
Centre Channel	120 W
Surround L/R Channels	120 W/ch
Minimum RMS Output Power (6 ohms, 1 kHz, 0.9% THD)	
Front Channels	100 W/ch
Centre Channel	100 W
Surround Channels	100 W/ch
Dynamic Power/Ch (Front L/R, 6/4/2 ohms)	105/130/150 W
Input Sensitivity/Impedance (AV5, 1 kHz, 100 W/6 ohms)	200mV/47 k-ohms
Output Level/Impedance	Rec Out 200 mV/1.2 k-ohms Subwoofer 1 V/1.2 k-ohms
Frequency Response (AV5, Front)	10 Hz–100 kHz +0, -3 dB

Total Harmonic Distortion (AV5, Straight, Front SP Out, 1 kHz)	0.06% (50 W/8 ohms)
Signal-to-Noise Ratio (AV5, Stereo, Input Shorted, Sp Out)	98 dB (250 mV)

## Video Section


Video Monitor Out Frequency Response Component Video Signal	5 Hz-60 MHz ±3 dB
---	-------------------

## Tuner Section

FM 50dB Quieting Sensitivity	Mono	3 µV (20.8 dBf)
FM Signal-to-Noise Ratio	Mono / Stereo	74 dB / 69 dB

## General

Standby Power Consumption	0.5 W
Dimensions (W x H x D)	435 x 151 x 315 mm
Weight	7.5 kg

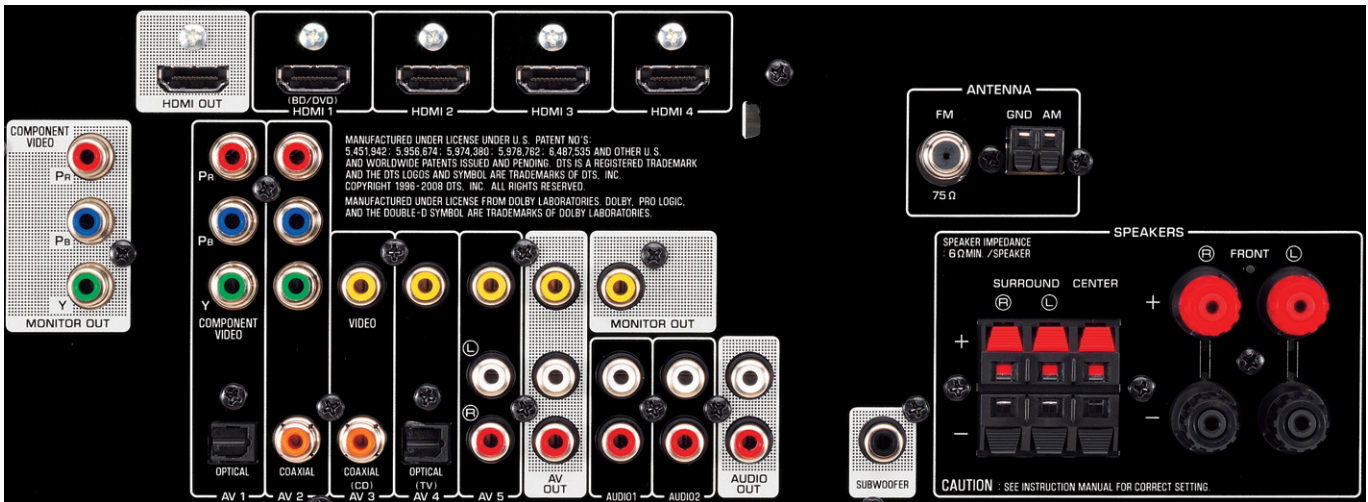

## Extensive Connections

Inputs	
HDMI (Audio Input Assignable)	4
Radio Antenna (FM/AM)	1 / 1
Optical Digital	2
Coaxial Digital	2
Analogue Audio*	4
Component Video (Audio Input Assignable)	2
Composite Video	4

\* Including front panel terminals.

Outputs	
HDMI	1
Analogue Audio	2
Component Video Monitor	1
Composite Monitor	1
Speaker (without subwoofer)	5ch
Subwoofer	1

• Dolby and the double-D symbol are registered trademarks of Dolby Laboratories. • "DTS" and "DTS Digital Surround" are registered trademarks of DTS, Inc. • HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. • "x.v.Colour" is a trademark. • CINEMA DSP is a trademark of Yamaha Corporation. • SILENT CINEMA is a trademark of Yamaha Corporation. • Product designs and specifications are subject to change without notice.